



13 January 2021

Ref: 171356/29220

Muswellbrook Coal Company
PO Box 123
Muswellbrook NSW 2333

RE: DECEMBER 2020 NOISE MONITORING RESULTS – MUSWELLBROOK COAL MINE

This letter report presents the results of noise compliance monitoring, commencing at about 12.45 am on Thursday 31st of December, 2020, and, again, at 10.00pm on Tuesday 5th of January, 2021 for the Muswellbrook Coal Company (MCC) mine at Muscle Creek Road, Muswellbrook.

Extended periods of adverse meteorological conditions (high wind and rain), and reduced operating hours at the mine, during December limited the periods where viable noise monitoring was possible. The monitoring commenced at 12.45 am on 31st of December under compliant meteorological conditions, but the wind speed increased throughout the monitoring survey. Light rain showers fell towards the end of the survey.

The monitoring was rescheduled for the next available period of suitable meteorological conditions which occurred on 5th January, 2021.

The results of both rounds of noise monitoring are included in this report.

The monitoring was undertaken as per the requirements of D.A. 205/2002 and detailed in the Noise Management Plan (NMP) for the mine.

Attended Noise Monitoring Program

Noise monitoring was undertaken in accordance with the NMP as summarised below.

All attended monitoring and equipment maintenance and calibration is conducted in accordance with the Noise Policy for Industry (NPI) and AS1055 – Acoustics, Description and Measurement of Environmental Noise.

Attended noise monitoring is undertaken monthly by an independent noise consultant. Each attended noise survey will be conducted during night periods only. If it is identified during the noise monitoring that the mining noise from the operation is exceeding the criteria, MCC will be notified and the operations will be modified as required. Monitoring at the location(s) where the noise levels are elevated will be undertaken again with a minimum break of 75 minutes between monitoring.

The noise criteria for MCC apply under all meteorological conditions except for the following:

- i. Wind speeds greater than 3m/s at 10m above ground level; or
- ii. Stability category F temperature inversion conditions and wind speeds greater than 2 m/s at 10m above ground level; or
- iii. Stability category G temperature inversion conditions.

To determine compliance with the Leq (15 min) operational noise criteria the modification factors detailed in Section 4 of the NPI must be applied, as appropriate, to the measured noise levels.

Due to the distance of the mine from each residence, the monitoring of LA1 (1minute) at the facade is not considered necessary and will be conducted at the property boundary.

The attended noise monitoring locations are detailed in **Table 1** and shown in **Figure 1**.

Table 1 Noise Monitoring Locations	
Location	Description
R13	Sandy Creek Road
R15	Queen St
R17	Queen St
R25	Sandy Creek Road
R32	Muscle Creek Road

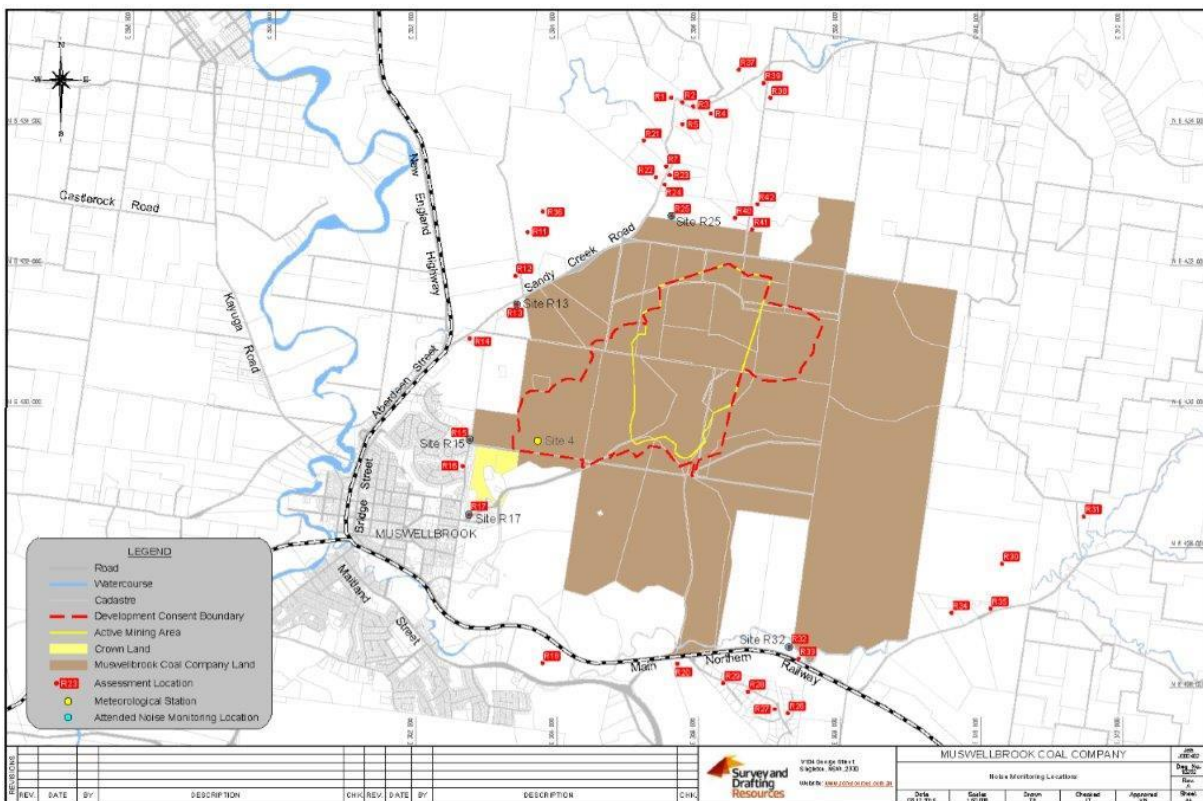


Figure 1 – Noise Monitoring Locations



Noise criteria for all assessment locations shown in Figure 1 are detailed in **Appendix I** to this report.

Monitoring Equipment

Attended noise monitoring was conducted with a Brüel & Kjær Type 2250 Precision Sound Analyser. This instrument has Type 1 characteristics as defined in AS1259-1990 “Sound Level Meters” and has current NATA calibration. Field calibration is carried out at the start and end of each monitoring period. Calibration certificates are attached as **Appendix II** to this report.

A-weighted noise levels were measured over the 15 minute monitoring period with data acquired of 1 second statistical intervals and the meter set to “fast” response. Each 1 second measurement is accompanied by a third-octave band spectrum from 20 - 20k Hz which is required for analysing NPI ‘modifying factors’.

Time based field notes allow for determination of the relative contributions to the overall noise level of all significant noise sources.

Measurement Analysis

The MCC compliance noise criteria are based on a 15 minute Leq noise level. The 15 minute Leq noise level for each monitoring period is shown in the tables below. Where the noise from MCC was audible Bruel & Kjaer “*Evaluator*” analysis software was used to quantify the contribution of the mine and other significant noise sources to the overall level. Mine noise from MCC is shown in the table in bold type.

All noise levels shown are in dB(A) Leq (15 min) unless otherwise detailed.

MCC Operations

Operational details for MCC on 31st December, 2020 and 5th January, 2021 are shown in **Appendix III**.

Noise Compliance Assessment

The results of the noise measurements undertaken on 31st December, 2020 are shown in **Table 2**.

Table 2 MCC Operational Noise Monitoring Results – 31 December 2020									
Location	Time	dB(A), Leq	MCC Contribution dB(A), Leq	Criterion dB(A) Leq	dB(A), L1 (1min) ¹	Criterion dB(A), L1 (1min) ¹	Stability Class ² / Wind speed (m/s)/dir ⁰	Compliant Met Conditions?	Identified Noise Sources ³
R13 Sandy Creek Rd.	1:10 am	43	<20	41	29	45	D/3.5/160	No	Frogs & insects (43), MCC occasionally audible
R15 Queen St.	1:40 am	39	<20	37	<25	45	D/3.8/155	No	Frogs & insects (39), MCC barely audible
R17 Queen St.	2:10 am	39	n/a	35	n/a	45	D/3.4/148	No	Frogs & insects (39), traffic (28), MCC inaudible
R25 Sandy Creek Rd.	12:45 am	40	30	42	35	45	D/3.0/172	Yes	Frogs & insects (40), MCC (30)
R32 Muscle Creek Rd.	2:41 am	35	n/a	35	<25	45	D/3.3/153	No	Frogs & insects (35), MCC inaudible

1. L1 (1 min) from MCC mine noise only
2. See text regarding stability class
3. See text regarding MCC noise sources

The results in Table 2 show that, under the operational and meteorological conditions at the time, noise from MCC did not exceed the relevant noise criteria at any time or location during the monitoring period on 31st December, 2020.

The data from the mine operated weather station showed that meteorological conditions were non-compliant with the conditions in the NMP at Locations R13, R15, R17 and R32. At the time of the noise monitoring at those locations wind speeds at the weather station were marginally higher than 3m/s. It was noted during the survey that wind speeds at ground level were relatively calm.

The results of noise measurements undertaken on 5th January, 2021 are shown in **Table 3**.

Table 3 MCC Operational Noise Monitoring Results – 5 January 2021									
Location	Time	dB(A), Leq	MCC Contribution dB(A), Leq	Criterion dB(A) Leq	dB(A), L1 (1min) ¹	Criterion dB(A), L1 (1min) ¹	Stability Class ² / Wind speed (m/s)/dir ^o	Compliant Met Conditions?	Identified Noise Sources ³
R13 Sandy Creek Rd.	10:20 pm	44	n/a	41	n/a	45	E/2.4/7	Yes	Frogs & insects (43), other mines (34), traffic (30), MCC inaudible
R15 Queen St.	10:45 pm	42	n/a	37	n/a	45	E/2.7/15	Yes	Frogs & insects (42), other mines (27), MCC inaudible
R17 Queen St.	11:03 pm	48	n/a	35	n/a	45	E/2.3/15	Yes	Frogs & insects (47), dogs (40), traffic (25), MCC inaudible
R25 Sandy Creek Rd.	10:00 pm	47	n/a	42	n/a	45	E/1.9/5	Yes	Frogs & insects (47), traffic (28), MCC inaudible
R32 Muscle Creek Rd.	11:35 pm	48	25	35	29	45	D/2.3/356	Yes	Frogs & insects (48), MCC (25)

1. L1 (1 min) from MCC mine noise only
2. See text regarding stability class
3. See text regarding MCC noise sources

The results in Table 3 show that, under the operational and meteorological conditions at the time, noise from MCC did not exceed the relevant noise criteria at any time or location during the monitoring period during the monitoring on 5th January, 2021.

The data from the mine operated weather station showed that meteorological conditions were compliant with the conditions in the NMP throughout the entire monitoring survey.

On December 31st, 2020, mine noise from Muswellbrook Coal was audible and measurable at monitoring location R25. At this location the mine noise was attributable to engine revs with occasional horns and dozer tracks. At location R13 the mine noise was only audible for part of the monitoring period. At location R15 the mine noise from Muswellbrook Coal was just audible on occasion, as low level mine hum. At each of these locations (R13 and R15) the noise was not consistent enough to be accurately measured.

On January 5th, 2021 mine noise from Muswellbrook Coal was audible and measurable at monitoring location R32. At this location the mine noise was attributable to engine revs and mine hum.

Data from those times where MCC operations were audible and measurable were analysed using the “*Evaluator*” software. This analysis showed the noise did not contain any tonal or impulsive components as per definitions in the NPI.

The methodology for analysing the low frequency noise modifying factor correction in the NPI is shown in extract below.

Low-frequency noise	Measurement of source contribution C-weighted and A-weighted level and one-third octave measurements in the range 10– 160 Hz	Measure/assess source contribution C- and A-weighted Leq,T levels over same time period. Correction to be applied where the C minus A level is 15 dB or more and: <ul style="list-style-type: none"> • where any of the one-third octave noise levels in Table C2 are exceeded by up to and including 5 dB and cannot be mitigated, a 2-dB(A) positive adjustment to measured/predicted A- weighted levels applies for the evening/night period • where any of the one-third octave noise levels in Table C2 are exceeded by more than 5 dB and cannot be mitigated, a 5-dB(A) positive adjustment to measured/predicted A- weighted levels applies for the evening/night period and a 2- dB(A) positive adjustment applies for the daytime period. 	2 or 5 dB ²	A difference of 15 dB or more between C- and A-weighted measurements identifies the potential for an unbalance spectrum and potential increased annoyance. The values in Table C2 are derived from Moorhouse (2011) for DEFRA fluctuating low-frequency noise criteria with corrections to reflect external assessment locations.
---------------------	--	---	------------------------	---

Table C2 : One-third octave low-frequency noise thresholds.

Hz/dB(Z)	One-third octave dB(Z) Leq (15 min) threshold level												
Frequency (Hz)	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
dB(Z)	92	89	86	77	69	61	54	50	50	48	48	46	44

The correction applies to the mine noise component only. There are many sources of low frequency noise in the acoustic environment of each receiver area (including noise from road and rail traffic and from rail track works). In many cases the C minus A level is greater than 15dB due to these other noise sources. In most instances the screening criteria will be the one third octave analysis. Should the mine noise not comply with this then the C minus A analysis will be applied.

Tables 4 and 5 show the low frequency noise analysis for the periods where the mine noise was able to be accurately isolated from the overall measurements during the monitoring at Locations R25 (31st December, 2020) and R32 (5th January 2021).

Frequency (Hz)	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
R25 Sandy Ck Rd.	<32	32.0	43.7	40.9	45.7	43.9	47.4	44.8	44.1	41.6	41.6	40.0	36.9
dB(Z) Criterion	92	89	86	77	69	61	54	50	50	48	48	46	44
Exceedance	0	0	0	0	0	0	0	0	0	0	0	0	0



Table 5 Low Frequency Noise Analysis – 5 January 2021													
Frequency (Hz)	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
R32 Muscle Ck Rd.	<30	30.0	41.2	39.5	42.5	40.8	45.3	39.8	40.1	41.7	41.8	38.0	34.6
dB(Z) Criterion	92	89	86	77	69	61	54	50	50	48	48	46	44
Exceedance	0	0	0	0	0	0	0	0	0	0	0	0	0

The results in Tables 4 and 5 show that there is no requirement to apply a low frequency noise modifying factor correction to the measured noise levels at any of the monitoring locations.

In addition to the operational noise, the noise from MCC must not exceed **45 or 47 dB(A) L1 (1 min)** between the hours of 10 pm and 7 am (see Appendix I for details of noise criteria at various receiver locations). This is to minimise the potential for sleep disturbance as a result of individual loud noises from the mine. The compliance measurement locations are different for each of the operational and sleep disturbance noise. That is, the sleep disturbance criterion is typically applicable at 1m from the facade of a bedroom window.

To avoid undue disturbance to residents the L1 (1 min) noise level from the operational measurements are used to show general compliance with the sleep disturbance criterion. That is, as the distance between the noise source and the operational noise monitoring location is significantly greater than the distance between the operational noise monitoring location and the sleep disturbance monitoring location (i.e. 1m from the facade of the house) there will be little variation in L1 (1 min) levels between the two monitoring locations.

It must be noted, however, that the sleep disturbance criterion is applicable at the outside of a bedroom window. As the internal layout of each residence is not known, to consider a worst case, the bedroom windows were assumed to be facing towards the mine.

As shown in Tables 2 and 3, during the night time measurement circuits the L1 (1 min) noise from MCC did not exceed 45 dB(A) at any monitoring location.

At each of the locations where the mine noise was audible the L1 (1 min) was attributable to loud engine revs.

We trust this report fulfils your requirements at this time, however, should you require additional information or assistance please contact the undersigned on 0412 023 455.

Yours faithfully,

SPECTRUM ACOUSTICS PTY LIMITED



Ross Hodge
Acoustical Consultant

Appendix I

Noise criteria from Development Consent DA205/2002 (Locations as per Figure 1).

Location	Day	Evening	Night	
	L _{Aeq} (15 minute)	L _{Aeq} (15 minute)	L _{Aeq} (15 minute)	L _{A1} (1 minute)
R1, R2, R3, R4, R17, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R37, R38, R39	35	35	35	45
R5	36	36	36	45
R7	38	38	38	45
R11	39	39	39	45
R12	39	39	39	45
R13	41	41	41	45
R14	38	38	38	45
R15	37	37	37	45
R16	36	36	36	45
R17	35	35	35	45
R18	45	38	37	47
R20	45	38	37	47
R21	37	37	37	45
R22	39	39	39	45
R23	39	39	39	45
R24	40	40	40	45
R25	42	42	42	45
R36	38	38	38	45
R40	42	42	42	45
R41	42	42	42	45
R42	40	40	40	45

Note: All levels are in dB(A)

Note: Following further consultation with the community it has been identified that R11 is a stable complex, not a residence, so the criteria listed in the table above do not apply.

Appendix II

Calibration Certificates

Brüel & Kjær

Australian Calibration Laboratory
Suite 2, 6-10 Talavera Road, North Ryde NSW 2113, Australia
Accredited for compliance with ISO/IEC 17025 - Calibration. Laboratory No. 1301

NATA
WORLD RECOGNISED
ACCREDITATION

CERTIFICATE OF CALIBRATION

Certificate No: CAU1901071

Page 1 of 12

CALIBRATION OF:

Sound Level Meter:	Brüel & Kjær	2250	No: 2747794
Microphone:	Brüel & Kjær	4189	No: 2733511
Preamplifier:	Brüel & Kjær	ZC-0032	No: 15339
Supplied Calibrator:	Brüel & Kjær	None	No: N/A
Software version:	BZ7224 Version 4.6.0	Pattern Approval:	PTB
Instruction manual:	BE1712-22	Identification:	N/A

CUSTOMER:

Spectrum Acoustics Pty Ltd
30 Veronica Street
Cardiff NSW 2285

CALIBRATION CONDITIONS:

Preconditioning: 4 hours at 23 °C
Environment conditions: *see actual values in Environmental conditions sections*

SPECIFICATIONS:

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC61672-1:2013 class 1. Procedures from IEC 61672-3:2013 were used to perform the periodic tests.

PROCEDURE:

The measurements have been performed with the assistance of Brüel & Kjær Sound Level Meter Calibration System B&K 3630 with application software type 7763 (version 8.0 - DB: 8.00) and test procedure 2250-4189.

RESULTS:

	Initial calibration		Calibration prior to repair/adjustment
X	Calibration without repair/adjustment		Calibration after repair/adjustment

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k = 2$ providing a level of confidence of approximately 95 %. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the device under calibration.

Date of Calibration: 05/11/2019


Sajeéb Tharayil
Calibration Technician

Certificate Issued: 05/11/2019

Craig Patrick
Approved signatory


Reproduction of the complete certificate is allowed. Part of the certificate may only be reproduced after written permission.





Brüel & Kjær

Australian Calibration Laboratory
Suite 2, 6-10 Talavera Road, North Ryde NSW 2113, Australia
Accredited for compliance with ISO/IEC 17025 - Calibration, Laboratory No. 1301



NATA
WORLD-RECOGNISED
ACCREDITATION

CERTIFICATE OF CALIBRATION

No.: CAU1900185

Page 1 of 2

CALIBRATION OF:

Calibrator:	Brüel & Kjær	4231	No: 2466354
Description:	Acoustical Calibrator		
Identification:	N/A		
IEC Class:	1		

CUSTOMER:

Spectrum Acoustics Pty Ltd
30 Veronica Street
Cardiff NSW 2285

CALIBRATION CONDITIONS:

Preconditioning:	4 hours at 23 °C		
Environment conditions:	Air temperature:	23.8	°C
	Air pressure:	100.5	kPa
	Relative Humidity:	57.2	%RH

SPECIFICATIONS:
The acoustic calibrator has been calibrated in accordance with the requirements as specified in IEC60942.

PROCEDURE:
The measurements have been performed with the assistance of Brüel & Kjær acoustic calibrator calibration application software Type 7794 using calibration procedure 4231 Complete


RESULTS:

<input type="checkbox"/> Initial Calibration	<input type="checkbox"/> Calibration before repair/adjustment
<input checked="" type="checkbox"/> Recalibration without repair/adjustment	<input type="checkbox"/> Calibration after repair/adjustment

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the calibrator under calibration.

Date of Calibration: 14/03/2019

Certificate issued: 14/03/2019



Craig Patrick
Approved Signatory


Reproduction of the complete certificate is allowed. Part of the certificate may only be reproduced after written permission.

Appendix III

Operational Details – 31 December 2020 (12.45 am to 3.00 am)

For that period mining was carried out as follows;

- 211, 1 x D10 dozer, 4 x Hitachi 3500 trucks and 1 x Cat 777 in S23 hauling waste to the RL230 dump in Pit 1
- 211, 1 x Dozer, 3 x Hitachi 3500 and 2 x Cat 777's trucks in S25 hauling waste to RL230 dump in Pit 1
- 1 x D10 dozer on RL 233 dump in Pit 1. 1 x D10 dozer on Pit 2 dump
- No crushing or washing at CHPP
- 2 x graders
- 1 x watercart
- No drilling

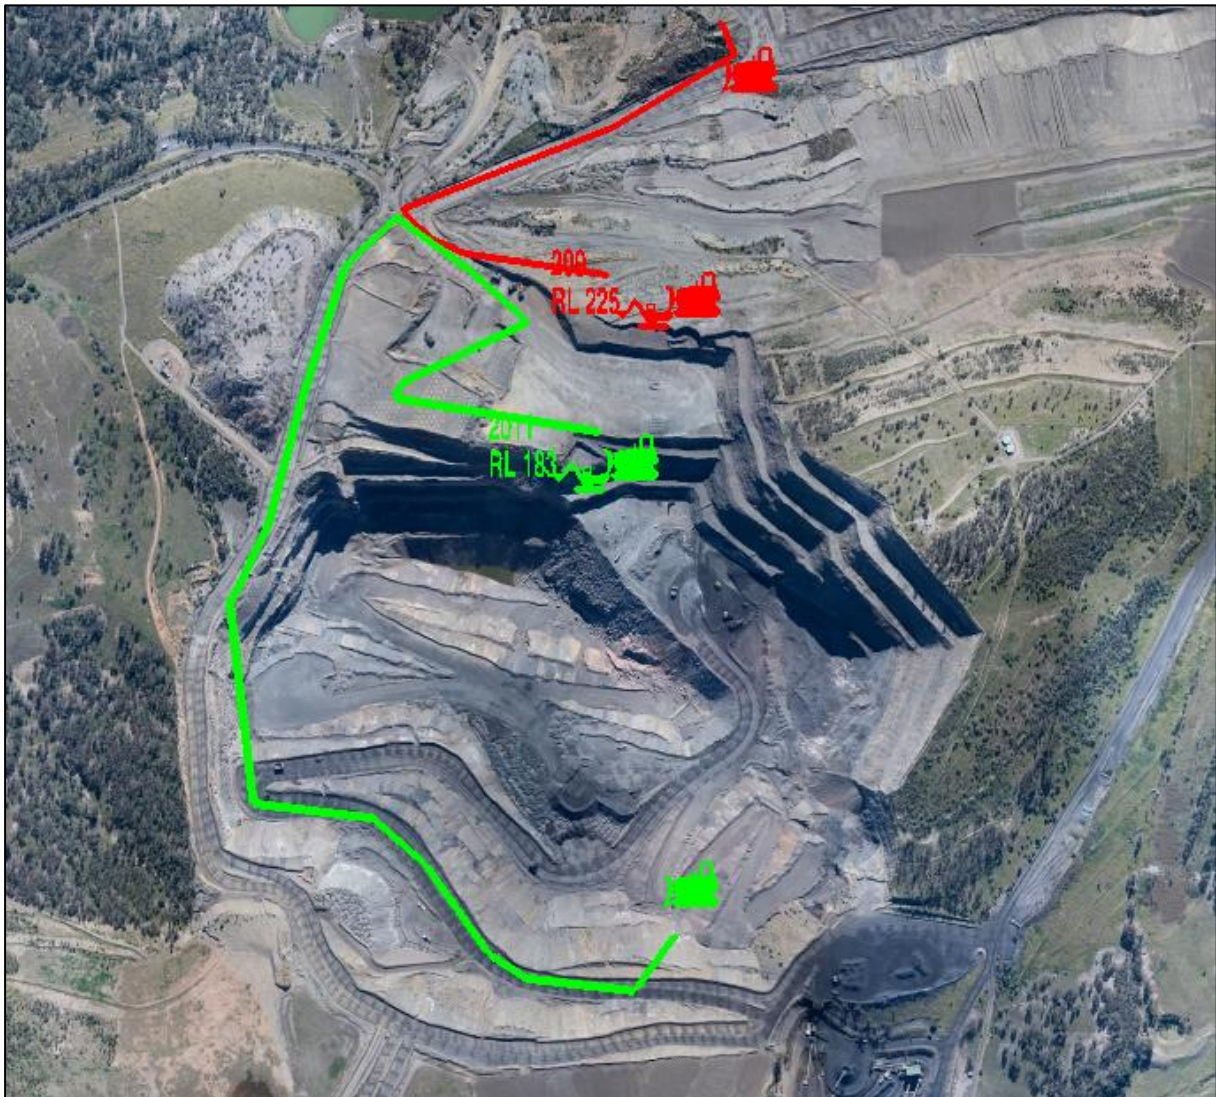

Operational Details – 5 January 2021 (10.00 pm to 12.00 am)

For that period mining was carried out as follows;

- 209, 1 x D10 dozer, 5 x Hitachi 3500 trucks in S23 hauling waste to the RL230 dump in Pit 1 from 10pm to midnight
- 211, 1 x Dozer, 2 x Hitachi 3500 and 2 x Cat 777's trucks in S25 hauling waste to RL230 dump in Pit 1 from 10pm to 11pm. Then breakdown
- 212, 1 x D10 dozer , 2 x Hitachi trucks and 2 x CAT 777's in S22 hauling waste to dump. Started at 11pm when 211 broke down and ran till midnight
- 1 x D10 dozer on RL 233 dump in Pit 1. 1 x D10 dozer on Inpit dump in Pit 1 while 212 running.
- No crushing or washing at CHPP
- 2 x graders
- 1 x watercart
- No drilling

