

15 January 2025

Ref: 212218/10670


Muswellbrook Coal Company Limited PO Box 123 Muswellbrook NSW 2333

RE: PLANT NOISE TEST RESULTS - DECEMBER 2024

This letter report presents the results of plant noise testing conducted for the Muswellbrook Coal Company (MCC) on 5 November 2024 as required in Section 8.2 of the MCC Noise Management Plan (August 2024).

MONITORING PROCEDURES

Dynamic testing was conducted using a modified version of ISO 6395:2008¹ that utilises one or two microphones to capture the same data as the four ground level points in the standard. The layout of the machinery path of motion and measurement points in the Standard are shown in **Figure 1**. When applied to dump trucks in motion, the forward measurement path is from point A to point B and then from B to A so that the microphones positions record both the left and right side of the vehicle.

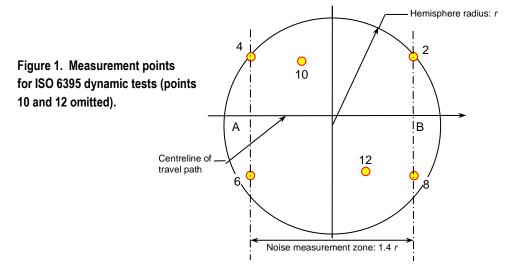

Measurement points 2 and 4 (6 and 8) were combined into a single point and the measurement zone extended to approximately 2.8 r to allow for an approach distance of 1.4 r to represent the measurement at point 2 (4) and a departure distance of 1.4 r to represent the measurement at point 6 (8). For measurements of dozer 1451 on the engine revs were held constant at 1850 rpm. NATA calibration certificates for the measurement equipment are attached to this report.

¹ Pennington, N. *Theoretical justification for modifying homologation standard ISO* 6395:2008(*E*) to suit the working mine site. Acoust. Aust. **45**, 77-84 (2017).



RESULTS

Calculated sound power levels (Lw, dB(A)) are presented in Table 1 below, with the test procedure (Stationary, dynamic or operational) noted along with the previously calculated sound power levels. All values are rounded to the nearest whole number with the method uncertainty error as defined in Annex N of ISO 6395. Due to some plant no longer being on site, new or contractor's plant coming to site and maintenance unavailability, not all plant items measured in 2024 were able to be compared with previous measurements. The comparison has been made wherever possible.

TABLE 1. Sound Power Levels, Lw dB(A) 5 November 2024							
Equipment	Action/Mode	Test condition	Lw (2023)	Lw, (2024)			
Excavator 212	Dynamic (rotation)	Stationary (operation)	115 ± 1	116 ± 1			
Water Cart 1117	Dynamic (forward)	Travel on incline	116 ± 1	116 ± 1			
CAT haul truck 1216	Dynamic (forward)	Travel on incline	N/A	118 ± 1			
CAT haul truck 1218	Dynamic (forward)	Travel on incline	118 ± 1	118 ± 1			
CAT haul truck 1219	Dynamic (forward)	Travel on incline	117 ± 1	118 ± 1			
CAT haul truck 4935	Dynamic (forward)	Travel on incline	N/A	116 ± 1			
CAT haul truck D1139	Dynamic (forward)	Travel on incline	N/A	117 ± 1			
Dozer 1451	Dynamic fwd/rev1	Drive-by	122 ± 1	120 ± 1			
CAT Grader 1547	Dynamic (fwd)	Travel on flat	N/A	103 ± 1			

¹ Geometric average of results for first and second gears.

Section 8.2 of the site Noise Management Plan (NMP, August 2024) states: "MCC conducts a survey of significant noise sources to determine the noise levels from the equipment. This survey will be completed so that all significant noise generating equipment is surveyed over a 3 year period. The results of this monitoring will be compared to previous results and if there is an increase of more than 2dB an investigation into the changes will be conducted to identify if any further mitigation on the equipment is required. As part of this investigation the attended noise monitoring results and complaints history will be considered." All items in Table 1 satisfy this requirement with respect to the most recently conducted measurements, where these are available.

We trust this report fulfils your requirements at this time, however, should you require additional information or assistance please do not hesitate to contact the undersigned.

Yours faithfully,

SPECTRUM ACOUSTICS PTY LIMITED

Neil Pennington MAIP, MAAS, MASA

Acoustical Consultant









Australian Calibration Laboratory Suite 4.03, Level 4, 3 Thomas Holt Drive, Macquarie Park NSW 2113, Australia Accredited for compliance with ISO/IEC 17025 - Calibration. Laboratory No. 1301

CERTIFICATE OF CALIBRATION

Certificate No: CAU2300638

Page 1 of 11

CALIBRATION OF:

Sound Level Meter:

Microphone:

Preamplifier: Supplied Calibrator:

Software version: Instruction manual: None BZ7224 Version 4.7.6

BE1897-11

Brüel & Kjær

Brüel & Kjær

Brüel & Kjær

2250 4966

ZC-0032

Pattern Approval:

Identification:

N/A

No: 2653961

No: 3343809

No: 25104

CUSTOMER:

Spectrum Acoustics Pty Ltd

8 Panylan St Cardiff NSW 2285

CALIBRATION CONDITIONS:

Preconditioning:

4 hours at 23 °C

Environment conditions:

see actual values in Environmental conditions sections

SPECIFICATIONS:

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC61672-1:2013 class 1. Procedures from IEC 61672-3:2013 were used to perform the periodic tests.

The measurements included in this document are traceable to Australian/National standards.

PROCEDURE:

The measurements have been performed with the assistance of Brüel & Kjær Sound Level Meter Calibration System B&K 3630 with application software type 7763 (version 8.6 - DB: 8.60) and test procedure 2250-4966.

RESULTS:

- D	Initial calibration	52 19	Calibration prior to repair/adjustment	
	Calibration without repair/adjustment	х	Calibration after repair/adjustment	

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor k = 2 providing a level of confidence of approximately 95 %. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the device under calibration.

Date of Calibration: 12/09/2023

Certificate issued: 12/09/2023

Sajeeb Tharayil

Craig Patrick

Calibration Technician

Approved signatory

Reproduction of the complete certificate is allowed. Part of the certificate may only be reproduced after written permission.